



## LS SERIES FRAMELESS MOTOR KIT

HIGH TORQUE-TO-WEIGHT RATIO | LIGHT-WEIGHT AND LOW-INERTIA | HIGHLY EFFICIENT  
RING ARCHITECTURE | ZERO COGGING FOR PRECISION MOVEMENT | SCALABLE IN SIZE AND POWER


### Data Sheet Model Number:

**LSI 152-29**

ThinGap's LS Line includes numerous high performance brushless permanent magnet motors. The LS line targets lower speed, high precision applications such as gimbals, optics, and precision robotics. The highest torque density with high power capability and low thermal resistance.

#### Winding Independent Parameter Table

Continuous Parameters	Units	Value
Continuous Torque @ Max Speed	N-m	3.87
Max Continuous Speed	RPM	2,000
Max Continuous Power	W	811
Peak Parameters @ Max Speed	Units	Value
Peak Torque (1 sec)	N-m	41.3
Peak Power (1 sec)	W	8,650
Peak Torque (3 sec)	N-m	24
Peak Power (3 sec)	W	5,027
Mechanical Parameters	Units	Value
Number of Magnetic Poles	ea	36
Outer Diameter	mm	152
Through Hole Diameter	mm	128
Axial Height	mm	29
Rotor Inertia	kg-m <sup>2</sup>	1.95E-03
Rotor Mass	kg	0.427
Stator Mass	kg	0.295
Part Set Mass	kg	0.722
Temperature Parameters	Units	Value
Max Stator Temperature	°C	130
Max Rotor Temperature	°C	85
Thermal Resistance	°C/W	1.168

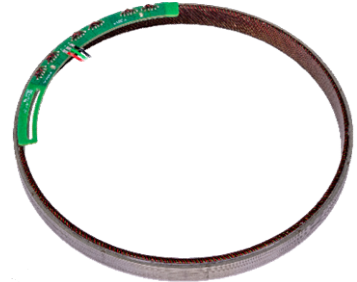

ThinGap's LS Line of Brushless Motors  
For low speed, high precision applications such as gimbals, optics, and precision robotics. Highest torque density with high power capability.  
Available in sizes 25mm to 267mm.

#### Torque and Mechanical Speed

Continuous rated torque of up to 3.87 N-m and a rated speed of up to 2000 RPM.

#### Motor Controller Recommendation

Standard 3-Phase Controller  
High Frequency PWM power input

#### Resources for Integration

Space-claim CAD files at:  
[www.thingap.com](http://www.thingap.com)

Complete Mechanical drawings available upon request

#### Winding dependent Parameter Table

		WYE SERIES	WYE PARALLEL*	DELTA PARALLEL*
Electrical Parameters	Units	Value	Value	Value
Required Motor Voltage @ Max Speed	V <sub>pkl-l</sub>	160.0	80.0	46.2
Max Continuous Phase Current	A <sub>RMS</sub>	4.6	9.3	16.1
Peak Phase Current (1 sec)	A <sub>RMS</sub>	48	96	166
Peak Phase Current (3 sec)	A <sub>RMS</sub>	28	56	97
Motor Resistance @ 20°C	Ω	2.11	0.53	0.18
Motor Resistance @ Max Temperature	Ω	2.97	0.74	0.25
Terminal Inductance	μH	114 ± 20%	28.5 ± 20%	9.5 ± 20%
Electrical Frequency @ Max Speed	Hz	600	600	600
Motor Constants	Units	Value	Value	Value
Voltage Constant (l-l)	V <sub>pkl-l</sub> /rad/s	0.706	0.353	0.204
Voltage Constant (l-l)	V <sub>pkl-l</sub> /kRPM	74.0	37.0	21.4
Torque Constant	N-m/A <sub>RMS</sub>	0.865	0.433	0.250
Motor Constant	N-m/√W	0.486	0.486	0.486

\*WYE Parallel and Delta Parallel winding option not available off-the-shelf; may be ordered as a special configuration.